

PS Series (PPG)

General Purpose Magnetic Drive Pumps

- Ideal for OEM and general applications.
- Available in 13 models with hose, threaded, or flange connection options.
- Constructed with cost-effective PP wetted-end material.

Materials in Contact : PPG

Max Flow : 120 L/min



Max Head : 26 m

Liquid Temp. : 0°C~70°C

Motor Power : 65 W to 330 W, JEM-0.2 kW



■ Pump performance curve

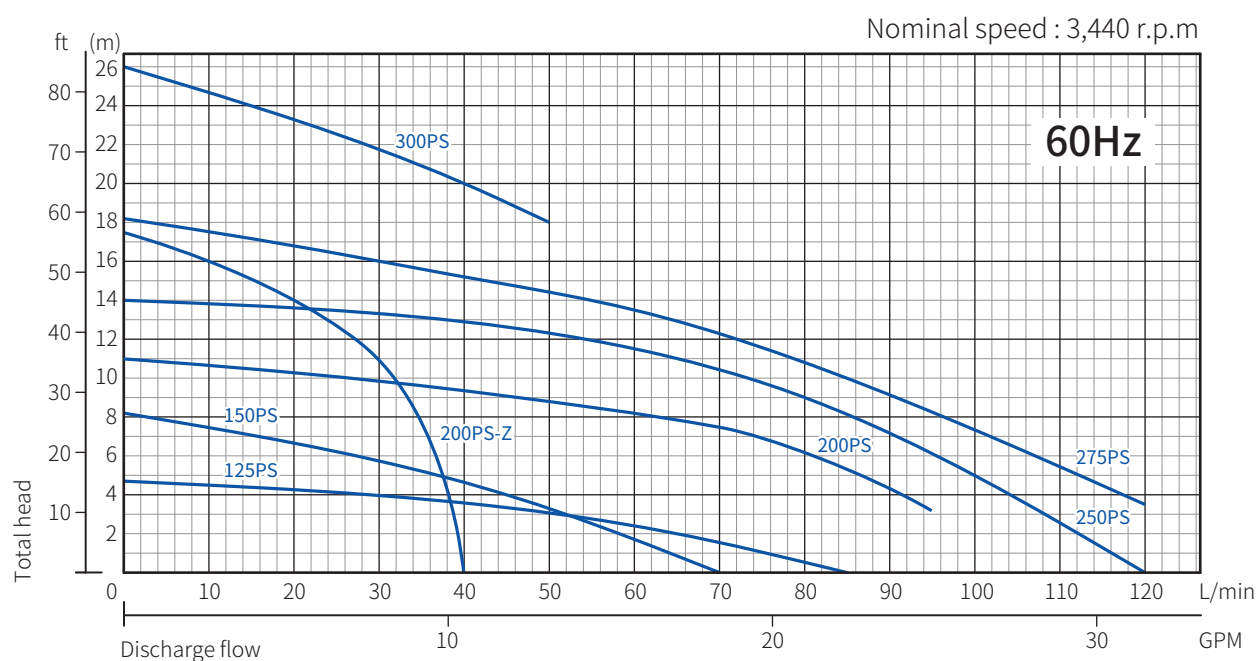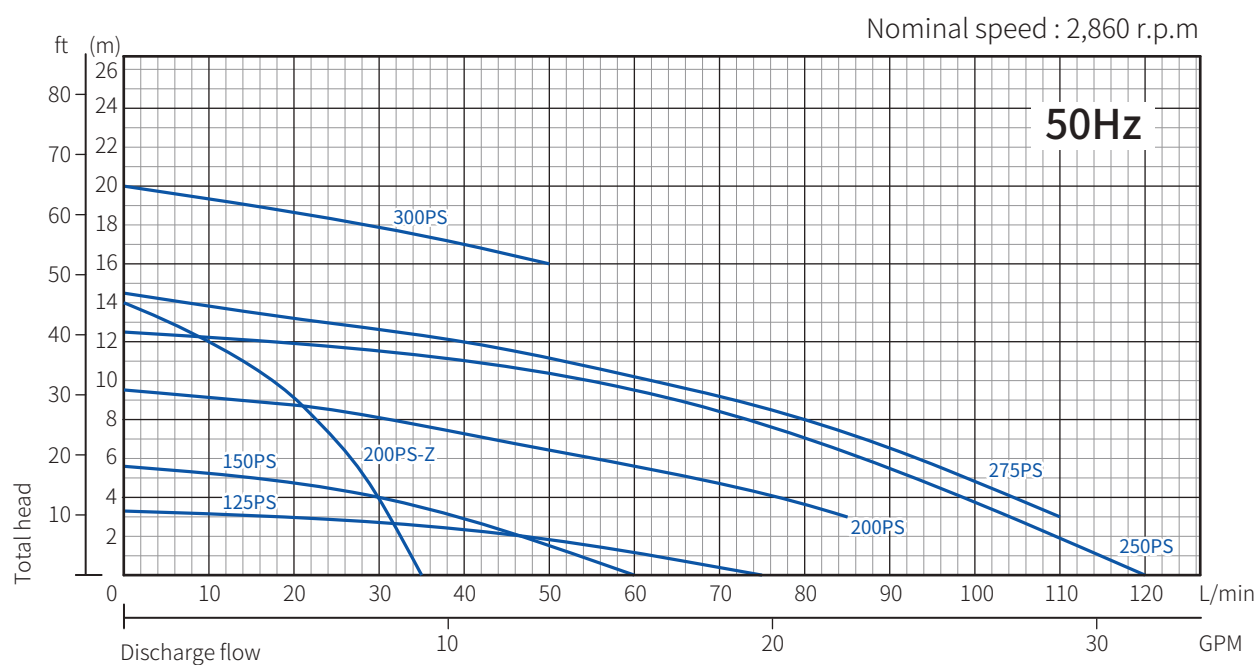

PS-F Series (ETFE)

Magnetic Drive Pumps for Hazardous Chemical Transfer

- Designed with ETFE wetted-end material for designed for hazardous chemical transfer, with 13 models available.
- Offers 13 models with hose, threaded, or flange connection options.

Materials in Contact	: ETFE
Max Flow	: 120 L/min
Max Head	: 26 m
Liquid Temp.	: 0°C~90°C
Motor Power	: 65 W to 330 W, JEM-0.2 kW



■ Pump performance curve

