

— WORTEX —

POMPE

CATALOGO GENERALE
GENERAL CATALOGUE



— WORTEX —

ENGINE

CATALOGO GENERALE
GENERAL CATALOGUE



WORTEX PRODUCTS

— WORTEX —

COMPRESSORI

CATALOGO GENERALE
GENERAL CATALOGUE



— WORTEX —

IRRORAZIONE E DISERBO

CATALOGO GENERALE
GENERAL CATALOGUE




GRINDER



GIRANTE HCR
HIGH CHROME IMPELLER



TRITURATORE
CUTTING

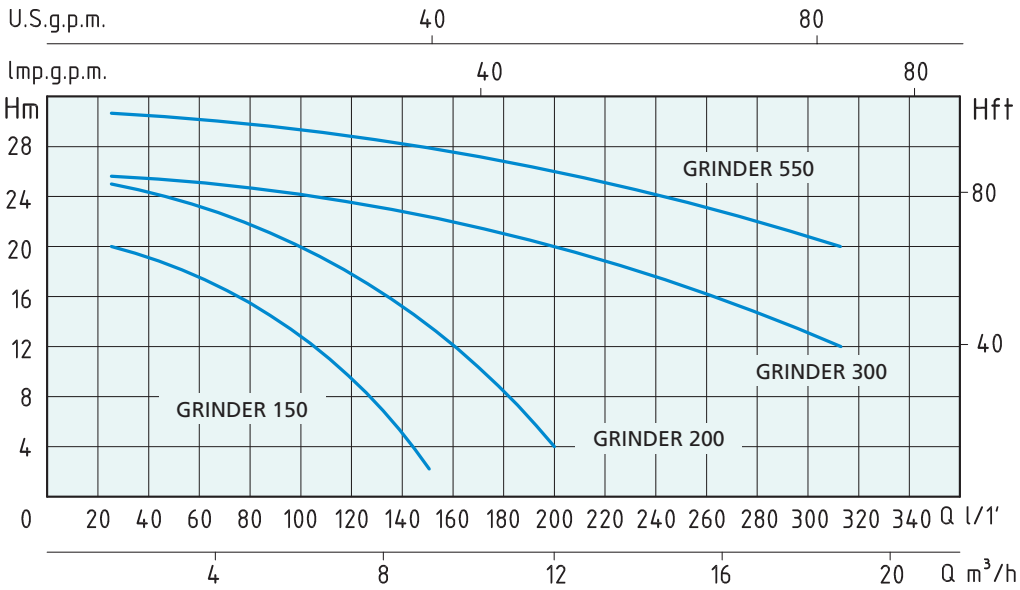

TIPO TYPE		POTENZA NOMINALE NOMINAL POWER		AMPERE		Q = PORTATA - CAPACITY										
Monofase Single-phase	Trifase Three-phase	P2		Monofase Single-phase	Trifase Three-phase	m³/h	1,5	3	6	8	9	12	15	16	18	19
		HP	kW													
230V-50Hz	230/400V-50Hz			1 x 230V	3 x 400V	lt/1'	25	50	100	133,3	150	200	250	266,6	300	316,6
Prevalenza manometrica totale in m.C.A. - Total head in meters w.c.																
GRINDER 150 S	GRINDER 150 T	1,5	1,1	7,5	3,2	H (m)	20	18,1	12,1	8	2					
GRINDER 200	GRINDER 200 T	2	1,5	8,5	3,5		24,9	23,8	20,3	13	10	4				
GRINDER 200 S		2	1,5	8,5	3,5		24,9	23,8	20,3	13	10	4				
	GRINDER 300-T	3	2,2		5,5		25,2	25,1	24,4	23,3	22,5	20	16	15	13	12
	GRINDER 550-T	5,5	4		12,2		31,3	31,2	30,4	29,1	28,4	26	24	23	21	20

ELETTROPOMPE SOMMERSE CON TRITURATORE
CUTTING SUBMERSIBLE PUMPS



APPLICAZIONI

Elettropompa con girante immersa di tipo multicanale aperta con sistema di triturazione in aspirazione. Particolarmente indicata in presenza di lunghe fibre filamentose o fibrose, di corpi solidi distruttibili anche di grandi dimensioni, nel trattamento di liquidi biologici e di acque di origine civile.

LIMITI D'IMPIEGO

- Temperatura liquido fino a 35°C (per un uso domestico secondo EN 60335-2-41)
Temperatura max. liquido: 40°C (per altri impiegi)
- Massima profondità d'immersione 30 mt. (con cavo di adatta lunghezza)
- Livello min. d'aspirazione 160 mm
- Servizio continuo

MOTORE

- Isolamento Classe F
- Protezione IP 68
- Protettore termico
- Funzionamento a secco

MATERIALI

- Corpo motore Ghisa
- Corpo pompa Ghisa
- Girante Ghisa
- Albero motore Acciaio Inox AISI 304
- Trituratore Acciaio Inox AISI 304
- Doppia tenuta meccanica in camera d'olio Ceramica/Grafite/NBR
Silicio/Silicio/NBR

APPLICATION

Electric pump with plunged impeller, this impeller is multi-pipe, open, with a cutting system in the suction. It is particularly suitable in presence of long, filamentous or fibrous fibres, of destroyable solids also of big dimensions and in biologic liquids or in civil waters.

OPERATING CONDITIONS

- Liquid temperature up to 35°C (for home use according to EN 60335-2-41)
Temperature max. liquid: 40°C (for other uses)
- Maximum immersion depth 30 mt. (with a cable of the appropriate length)
- Min. suction level 160 mm
- Continuous duty

MOTOR

- Insulation Class F
- Protection IP 68
- Thermic protection
- Dry type

MATERIALS

- Motor body Cast Iron
- Pump body Cast Iron
- Impeller Cast Iron
- Shaft with rotor Stainless Steel AISI 304
- Cutting Stainless Steel AISI 304
- Double mechanical seal in oil chamber Ceramic/Graphite/NBR
Silicon/Silicon/NBR

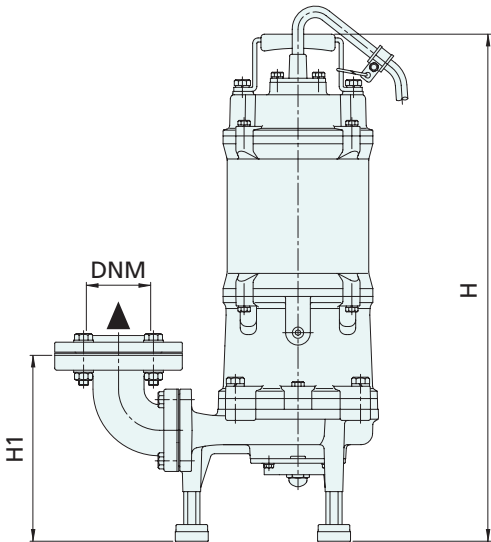
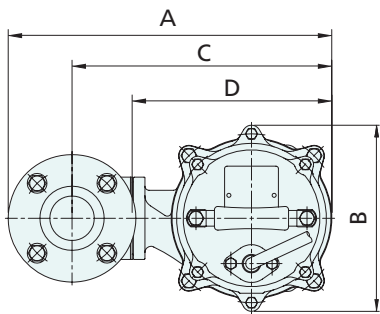


Table with 14 columns: TIPO TYPE, DIMENSIONI mm - DIMENSIONS mm (A, B, C, D, H, H1, DNM, CAVO CABLE), DIMENSIONI DIMENSIONS mm (P, L, H), and PESO WEIGHT Kg. Rows include GRINDER 150 S/T, GRINDER 200 S/T, GRINDER 300-T, and GRINDER 550-T.