

— WORTEX —

POMPE

CATALOGO GENERALE
GENERAL CATALOGUE



— WORTEX —

ENGINE

CATALOGO GENERALE
GENERAL CATALOGUE



WORTEX PRODUCTS

— WORTEX —

COMPRESSORI

CATALOGO GENERALE
GENERAL CATALOGUE




— WORTEX —

IRRORAZIONE E DISERBO

CATALOGO GENERALE
GENERAL CATALOGUE



SWG

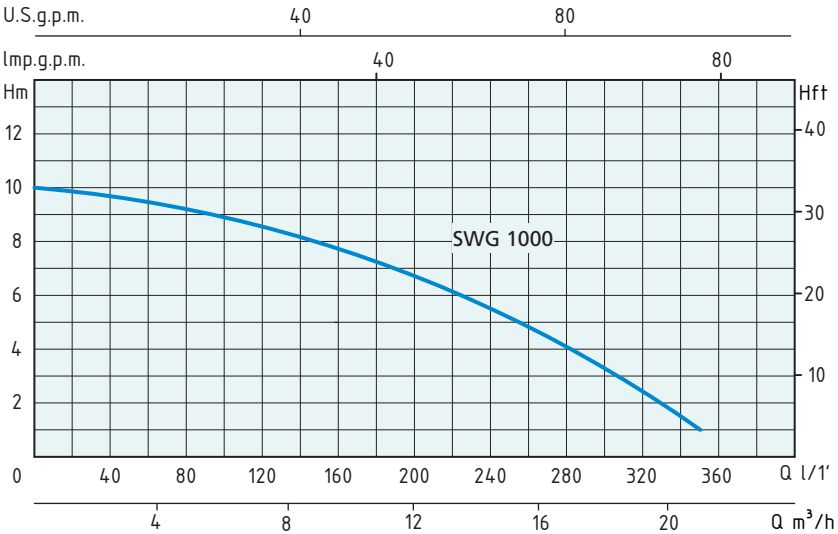

TIPO TYPE	POTENZA ASSORBITA INPUT POWER	AMPERE	Condensatore Capacitor	Q = PORTATA - CAPACITY								
				m³/h	1,8	3,6	5,4	7,2	9	12	15	18
Monofase Single-phase	P1	Monofase Single-phase	µf	lt/1'	30	60	90	120	150	200	250	300
230V-50Hz	Watt	1 x 230V		Prevalenza manometrica totale in m.C.A. - Total head in meters w.c.								
SWG 1000	1400 W	6,5	25	H (m)	10,7	10,4	9,8	9,4	9	8,3	7,7	7,1

ELETTROPOMPA SOMMERSA PER ACQUE CARICHE

SUBMERSIBLE PUMP FOR DIRTY WATER



APPLICAZIONI

Elettropompe sommersa inox per drenaggio con girante in acciaio inox adatte per svuotamento di fosse di decantazione e per pompaggio di acque luride ad uso domestico e civile.

LIMITI D'IMPIEGO

- Temperatura liquido fino a 35° C
- Profondità d'immersione 5 mt.
- Passaggio solidi Ø 40 mm
- Livello min. d'aspirazione 65 mm

MOTORE

- Motore elettrico ad induzione a 2 poli
- Motoprotettore incorporato
- Condensatore permanente inserito
- Isolamento Classe F
- Protezione IP 68

MATERIALI

- | | |
|--------------------|------------------|
| - Maniglia | Polipropilene |
| - Corpo pompa | Acciaio Inox |
| - Girante | Ghisa |
| - Cassa motore | Acciaio Inox |
| - Albero motore | Acciaio Inox |
| - Tenuta meccanica | Ceramica/Grafite |

APPLICATION

Drainage submersible stainless steel water pumps with stainless steel impeller.
Able to drain decanting cesspools and to pump waste water for domestic and civil purposes.

OPERATING CONDITIONS


- Liquid temperature up to 35°C
- Submersion depth 5 mt.
- Grain size inlet Ø 40 mm
- Min. suction level 65 mm

MOTOR

- 2 pole induction motor
- Incorporated motorprotector
- Permanent split capacitor
- Insulation Class F
- Protection IP 68


MATERIALS

- | | |
|--------------------|------------------|
| - Handle | Moplen |
| - Pump body | Stainless Steel |
| - Impeller | Cast Iron |
| - Motor casing | Stainless Steel |
| - Shaft with rotor | Stainless Steel |
| - Mechanical seal | Ceramic/Graphite |

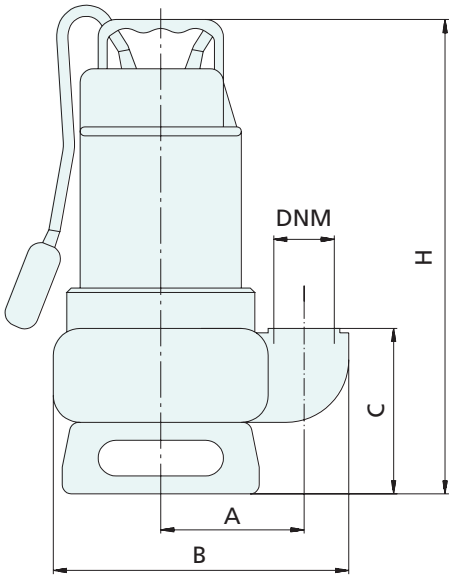

TIPO TYPE	DIMENSIONI mm - DIMENSIONS mm						DIMENSIONI DIMENSIONS mm			PESO WEIGHT
	A	B	C	H	DNM	CAVO CABLE	P	L	H	
Monofase Single-phase										Kg
SWG 1000	112	232	14,3	38,3	2"	10 mt H07RNF	211	248	430	14,2

SWX

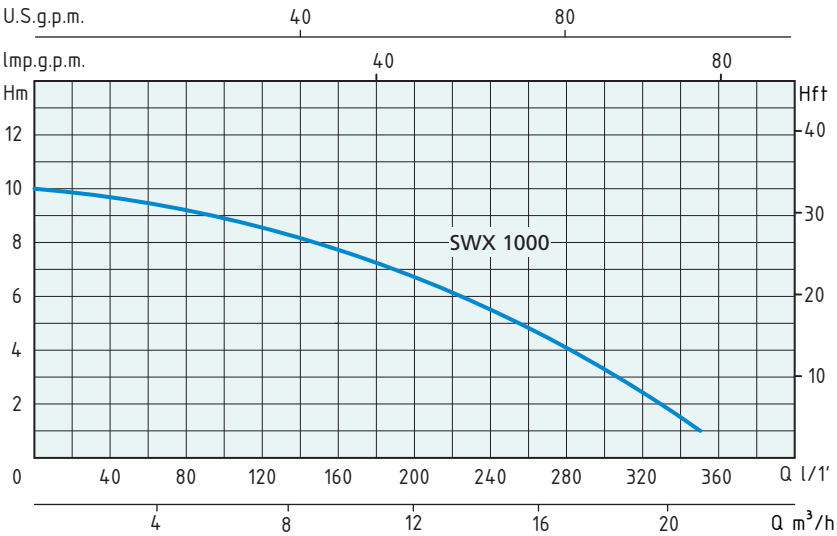

TIPO TYPE	POTENZA ASSORBITA INPUT POWER	AMPERE	Condensatore Capacitor	Q = PORTATA - CAPACITY								
				m³/h	1,8	3,6	5,4	7,2	9	12	15	18
Monofase Single-phase	P1	Monofase Single-phase	µf	lt/1'	30	60	90	120	150	200	250	300
230V-50Hz	Watt	1 x 230V		Prevalenza manometrica totale in m.C.A. - Total head in meters w.c.								
SWX 1000	1400 W	6,5	25	H (m)	10,7	10,4	9,8	9,4	9	8,3	7,7	7,1

ELETTROPOMPA SOMMERSA INOX PER ACQUE CARICHE
STAINLESS STEEL SUBMERSIBLE PUMP FOR DIRTY WATER



APPLICAZIONI

Elettropompe sommersa inox per drenaggio con girante in acciaio inox adatte per svuotamento di fosse di decantazione e per pompaggio di acque luride ad uso domestico e civile.

LIMITI D'IMPIEGO

- Temperatura liquido fino a 35° C
- Profondità d'immersione 5 mt.
- Passaggio solidi Ø 40 mm
- Livello min. d'aspirazione 65 mm

MOTORE

- Motore elettrico ad induzione a 2 poli
- Motoprotettore incorporato
- Condensatore permanente inserito
- Isolamento Classe F
- Protezione IP 68

MATERIALI

- | | |
|--------------------|------------------|
| - Maniglia | Polipropilene |
| - Corpo pompa | Acciaio Inox |
| - Girante | Acciaio Inox |
| - Cassa motore | Acciaio Inox |
| - Albero motore | Acciaio Inox |
| - Tenuta meccanica | Ceramica/Grafite |

APPLICATION

Drainage submersible stainless steel water pumps with stainless steel impeller.
Able to drain decanting cesspools and to pump waste water for domestic and civil purposes.

OPERATING CONDITIONS


- Liquid temperature up to 35°C
- Submersion depth 5 mt.
- Grain size inlet Ø 40 mm
- Min. suction level 65 mm

MOTOR

- 2 pole induction motor
- Incorporated motorprotector
- Permanent split capacitor
- Insulation Class F
- Protection IP 68

MATERIALS

- | | |
|--------------------|------------------|
| - Handle | Moplen |
| - Pump body | Stainless Steel |
| - Impeller | Stainless Steel |
| - Motor casing | Stainless Steel |
| - Shaft with rotor | Stainless Steel |
| - Mechanical seal | Ceramic/Graphite |

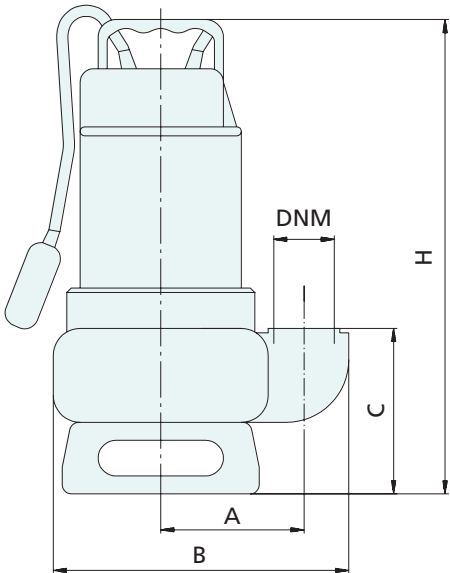

TIPO TYPE	DIMENSIONI mm - DIMENSIONS mm						DIMENSIONI DIMENSIONS mm			PESO WEIGHT
	A	B	C	H	DNM	CAVO CABLE	P	L	H	
Monofase Single-phase										Kg
SWG 1000	112	232	14,3	38,3	2"	10 mt H07RNF	211	248	430	11,3